



## บรรณานุกรม

- กฤษณะ ชินสาร. (2540). *ระบบตรวจข้อสอบปรนัยอัตโนมัติ*. วิทยาศาสตร์มหาบัณฑิต, สาขา  
วิทยาการคอมพิวเตอร์และเทคโนโลยีสารสนเทศ, บัณฑิตวิทยาลัย, สถาบันเทคโนโลยีพระ  
จอมเกล้าเจ้าคุณทหารลาดกระบัง.
- ณัฐวัชร มาลัย และสินชัย ชินวรรรัตน์. (2549) การวิเคราะห์และตรวจสอบความบกพร่องของฝ้าย้อม.  
ใน การประชุมวิชาการเครือข่ายวิศวกรรมเครื่องกลแห่งประเทศไทยครั้งที่ 20.สมาคม  
สำรวจข้อมูลระยะไกลและสารสนเทศภูมิศาสตร์แห่งประเทศไทย. (2551).
- ความรู้พื้นฐานด้าน Geoinformatic เพื่อการอ่านให้เข้าใจยิ่งขึ้น. วันที่ค้นข้อมูล 12 กันยายน 2551,  
เข้าถึงได้จาก <http://resgat.net>
- Aria Pezeshk, & Richard L. Tutwiler. (2008). Contour Line Recognition & Extraction  
from Scanned Colour Maps Using Dual Quantization of the Intensity Image.  
In *Proceedings of the SSIAI 2008* (pp. 173-176).
- Charles W. Therrien. (1989). *Decision Estimation and Classification: An Introduction to  
Pattern Recognition and Related Topics*. John Wiley & Sons.
- Dongjun Xin, Xianzhong Zhou and Huali Zheng (2006). Contour Line Extraction from  
Paper-based Topographic Maps, In *Journal of Information and Computing  
Science*, Vol. 1, No.5, 2006, (pp. 275-283).
- Du Jinyang, & Zhang Yumei. (2004). Automatic extraction of contour lines from  
scanned topographic map. In *Proceedings of IEEE International Geoscience  
and Remote Sensing Symposium* (pp. 2886 – 2888).
- Michal Stec. (2006). Fast Creation of Realistic and Efficient Free Path Network within a  
Simulation Model of a Shop Floor and a Supply Chain System. In  
*Proceedings of the 2006 Winter Simulation Conference* (pp. 1531-1536).
- Pang-Ning Tan, Michael Steinback, & Vipin Kuman. (2006). *Introduction to Data  
Mining*. Addison Wesley.
- Qixiang Ye Wen Gao, & Wei Zeng. (2003). Color Image Segmentation using Density-  
based Clustering. In *Proceedings of the 2003 IEEE International Conference  
on Acoustics, Speech & Signal Processing* (pp.401-404).


- Rafael C. Gonzalez, Richard E. Woods, & Steven L. Eddins. (2004), *Digital Image Processing using Matlab*. Prentice Hall.
- Sedtha Pota, Suwanna Rasmequan, & Krisana Chinnasarn. (2009). Recognition of Altitude Numeric of Index Contour Lines from Scanned Topographic Map using Density Based Clustering and Back-propagation Neural Network Techniques. In *Proceedings of 13th International ANnual Symposium on Computational Science and Engineering* (pp. 284 -289).
- Simon Haykin. (1998). *Neural Networks: A Comprehensive Foundation* (2nd ed.). Prentice Hall.

ภาคผนวก

**ภาคผนวก ก**  
**ชุดข้อมูลภาพสำหรับการสอน**

5800	5800	7100	5900	4910	6500	5200	5650
4940	5370	6200	5300	4990	4910	5370	5800
7400	7500	6150	5200	5300	6100	5620	5700
4890	5400	5620	6100	5400	4985	5700	5400
5300	6700	5100	4995	5900	6300	4500	4980
4960	5900	5640	5700	5005	5500	5700	5700
5700	5100	6100	6200	6300	5300	5300	6200
5015	4900	5100	6200	7100	7400	6300	5700
6600	5400	5200	5300	5300	5100	4400	4980
5800	6200	4400	4980	5100	4715	4950	4910
5350	5750	5500	5900	5650	5800	6300	5800
4725	4730	4940					

6200	5800	5900	5900	5200	4800	4600	5600
6100	6300	5700	5700	5200	5200	5100	5300
5300	5700	6100	6100	4500	5900	5900	5800
6100	6100	6000	5900	5800	5400	5700	4160
5400	6300	4970	5500	5800	5400	6400	6200
4900	4600	4990	5070	4900	4900	4870	5400
5850	5950	5650	5400	5900	5200	4870	4900
6100	5950	6100	5700	6400	5200	6100	5200
4725	5400	4800	5300	5300	5250	4700	4420
4990	5200	5100	5050	4910	5100	6700	4910
6050	5100	5400	4910	5300			

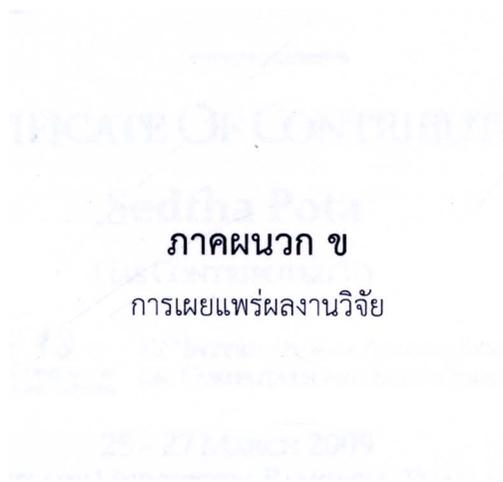



# CERTIFICATE OF CONTRIBUTIONS

## Sedtha Pota

HAS CONTRIBUTED TO



**ANSCSE 13**

13<sup>th</sup> International Annual Symposium on  
Computational Science and Engineering

13<sup>th</sup> INTERNATIONAL ANNUAL SYMPOSIUM  
ON COMPUTATIONAL SCIENCE AND ENGINEERING

25 – 27 MARCH 2009

KASETSART UNIVERSITY, BANGKOK, THAILAND

**Dr. Putchong Uthayopas**  
Chairman,  
ANSCSE13

**Dr. Supa Hannongbua**  
President,  
Computational Science and Engineering Association




# ANSCSE 13

13<sup>th</sup> International Annual Symposium on Computational Science and Engineering

March 25 - 27, 2009

Faculty of Engineering, Kasetsart University  
Bangkok, Thailand

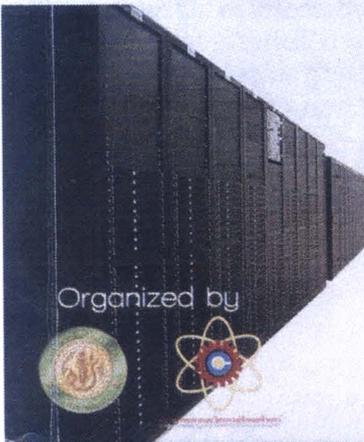

Organized by



Sponsored by

**NECTEC**<sup>1</sup>  
a member of NSTDA

# Recognition of Altitude Numeric of Index Contour Lines from Scanned Topographic Map Using Density Based Clustering and Back-propagation Neural Network Techniques

Sedtha Pota\* Suwana Rasmequan Krisana Chinnasarn

*Department of Computer Science, Faculty of Science, Burapha University  
169 T.sansuk, A.Muang, Chonburi 20131*

\* E-mail: [sedtha.p@student.buu.ac.th](mailto:sedtha.p@student.buu.ac.th), [mr.danceess@gmail.com](mailto:mr.danceess@gmail.com)


## ABSTRACT

Topographic maps are used to find out terrain distance by calculating Euclidean distance of each interval with altitude (sea level height) values from index contour lines. Typically, recognition of altitude numeric of index contour lines is very difficult because topographic maps involve various features and each altitude numeric has been displayed in different directions. Furthermore, scanned topographic maps always have a chromatic aberration problem which leads to false color representation. This paper presents a method to recognize altitude numeric of index contour lines from scanned topographic maps by density based clustering and back-propagation neural network techniques. The experimental results prove that the proposed method reaches a satisfactory level.

**Keywords:** Index contour line, Altitude, Topographic map

## 1.Introduction

A topographic map is a way to represent the Earth's surface. The distinctive characteristic of a topographic map is the way in which the shape of the Earth's surface is represented by contour lines. Contour lines provide information about the height of mountains, the depth of the ocean bottom, and the steepness of slopes. In particular, there is an altitude numeric on index contour lines for indicating height of reference surface. Traditionally, topographic maps have been printed on paper. When a printed map is scanned, the computer file that is created may be called a digital raster image. Once we got this type of file format, if we would want to know the values of altitude numeric, we may recognize them by using neural network technique. However, due to a great amount of information that is contained in a scanned topographic map, plus the direction of the numbers is varied, it is quite hard to retrieve the altitude numeric of index contour lines from scanned topographic. This paper has proposed techniques and algorithm to recognize an altitude numeric from such a scanned Topographic Map file.

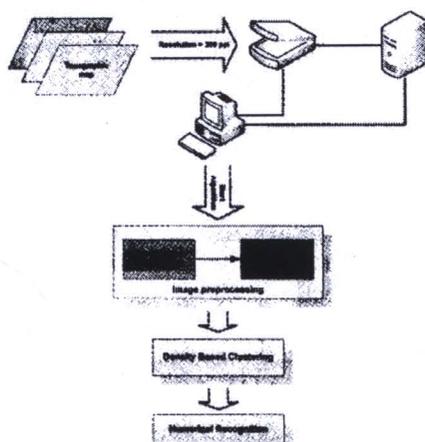

**Figure 1:** An overview of altitude numeric recognition algorithm

In this paper, we present an algorithm for recognition of altitude numeric which has 3 processes as following:

1. Extract foreground and index contour lines from scanned topographic map using image processing technique.
2. Retrieve altitude numeric from index contour lines using density based clustering technique.
3. Recognize altitude numeric using back-propagation neural network techniques.

The input file type that needed for our experimentation is a scan printed topographic map. Such a file should be scanned with a resolution of at least 200 ppi, otherwise the result will not be satisfied.

## 2. Related work

Although there are a number of researches and studies on recognition from scanned topographic map, to the best of our knowledge, there is none of them make the study on recognition of altitude numeric of index contour lines. However, we have studied and applied some of the methods to our work as the followings.

**Foreground extraction:** Topographic maps contain great amounts of information superimposed onto a single 2D layer, resulting in a complex mixture of touching text and graphics components. The information on these maps consists of sets of linear features (such as contour lines, and roads) and area features (such as buildings, and bodies of water). Automatic extraction of these different layers of information poses a substantial challenge due to the heavy interconnection of layers [1]. However, most of the useful information in a topographic map is sets of linear feature which is located in the image foreground. Background colors and textured such as bodies of water and vegetation patterns are used to represent with area features.

**Index contour line retrieval:** As we mentioned in previous topic, foreground is set of linear features and contour line is one of them. Therefore, we have to extract index contour lines form foreground image after we extract foreground from scanned topographic map. Jinyang [2] extracts contour lines by setting certain thresholds in HIS color space. Although this method can use to extract contour lines, it is not flexible. This is because of the manual thresholds

setting. Topographic maps always have a false color problem due to lateral chromatic aberration which in turn is a result of the difference between the refractive index of the scanner's lens for different wavelengths of light [1].

**Density based clustering:** In 1996, Martin Ester proposed a density-based algorithm for discovering spatial databases with noise [3]. After the algorithm had proposed, there are many researches cited on and applied it to their works. 'Color image segmentation using density-based clustering' is the one of researches that applied the algorithm with color segmentation. Owing to image can be considered as a special spatial dataset in which each pixel as a spatial location and a color value. Therefore, the algorithm was used to discover clusters in spatial will be effective on discovering clusters in an image. Pixels which are similar in color and connective in spatial can be clustered together to form a segmented region [4].

### 3. Proposed method

In this section, we present an algorithm to recognize altitude numeric of index contour lines from Scanned Topographic Map Using Density Based Clustering and Back- propagation Neural Network Techniques. Firstly, we will describe about image preprocessing which is divided into two sub-processes. Secondly, we will explain about segmentation using density based clustering technique and direction problem solving. Finally, we will discuss about recognition using back-propagation neural network techniques.

Data preparation is one of the significant factors to our experiment. That is, topographic map must be scanned with a resolution of more than 200 ppi. Additionally, there are three basic conditions which are general characteristics of topographic maps that are necessary for our experiment. First, the index contour lines of topographic map must be in brown color and more intensive than intermediate contour lines. Second, the index contour lines must be thicker than intermediate contour lines. Third, the major space of the foreground of topographic map should be contour lines.

#### 3.1 Image preprocessing

According to a variety of information on topographic map, such as sea level, forest territories, road way and rivers, therefore we need to extract only specific information from

those overwhelming information. That is the index contour lines. This step can be divided into 2 processes, the first one is foreground extraction process and the other is index contour line retrieval process.

##### 3.1.1 Foreground extraction

Aria Pezeshk and Richard Tutwiler [1] use Otsu's method to binarize original image. The binarization procedure help removes background colors. For those simple background textures such as dotted patterns are then removed using a median filter with a small window size. Such a process help eliminates thin parts of lines and characters as well and therefore a masked dilation is performed to restore the lost parts. The following equation has been implemented to restore pixels which existed in the original image by preventing uncontrolled propagation of lines and other features:

$$D_g f = g \cap Df \quad (1)$$

where  $D$  is the dilation operator consisting of a square  $3 \times 3$  structuring element and  $g$  is taken as the original binary image. The resulting image is used as a binary mask for each of the RGB channels to extract the foreground portion of the map:

$$\begin{aligned} \text{Foreground}(:, :, i) &= \text{image}(:, :, i) \cdot \text{mask} + \\ &255 * (\sim \text{mask}); i = 1, 2, 3 \end{aligned} \quad (2)$$

The result image consists of all foreground objects in their original colors and the background was washed out to pure white (255,255,255). This first step preprocess has been implemented in our work. However, the preliminary result needs to be further improved by the following step. This is because the foreground image consists of various linear features such as contour lines, symbols and road ways.

### 3.1.2 Index contour line retrieval

After we have got the foreground image from previous process, we then try to retrieve index contour lines with histogram analysis method [5] which is more flexible than color separation method [2]. According to topographic maps characteristics, index contour line is normally thicker and more intensive than intermediate contour line so we can use histogram to analyze characteristics of index contour line of the interested map. Typically, standard index contour line color is dark brown so that blue color is darker than others. Although we know about combination of brown color, it is not proper to set certain thresholds. This is due to lateral chromatic aberration that causes a false color problem (a large distribution of each color space which is depended on quality of scanning process). If we set certain thresholds on each color space, we then cannot retrieve all pixels of index contour lines.

Normally each color space of the extracted foreground can be divided into two groups (dark and bright as illustrated in Figure 2), therefore a histogram analysis using Otsu's method has been proposed as a way to classify those index and non-index lines. In addition, we also consider the distribution of the color space to adjust the set value of the ratio among blue, red and green.

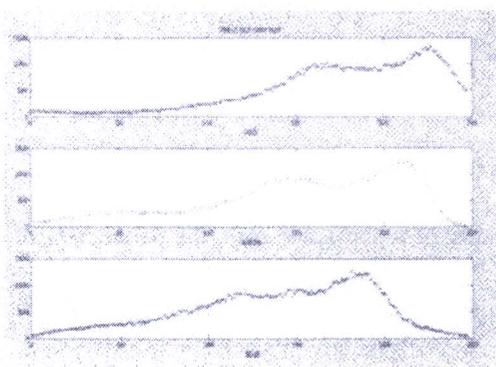


Figure 2: Color space of sample image after foreground extracting

### 3.2 Altitude numeric segmentation using density based clustering

After we retrieve index contour lines from foreground image in preprocess, the new image will consist of altitude numeric and line. Our objective is to retrieve only altitude numeric of index contour line. Therefore, we apply density based clustering technique to segment altitude numeric from index contour image.

Parameter definitions of the DBSCAN are given below and then follows with a briefly introduction to the main idea of the algorithm.


Given a spatial dataset and objects in it distributes in a two-dimension space:

- The neighborhood within a radius of a given object is called the Eps of the object.
- If the Eps of an object contains at least a minimum number, MinPts, of object with similar property, then the object is called a core object.

- For the set of object, we say that object  $p$  is directly density-reachable from object  $q$  if  $p$  is within the Eps of  $q$ , and  $q$  is a core pixel (Figure 3).

- Density reachability is the transitive closure of direct density reachability and this relationship is asymmetric. This asymmetric density reachability is density connectivity (Figure 3).

DBSCAN searches for clusters by checking the Eps of each point in the dataset. If the Eps of a point  $p$  contains more than MinPts, a new cluster with  $p$  as the core object is created. DBSCAN then iteratively collects directly density-reachable objects from these core objects, which may involve the merge of a few density-reachable clusters. The process terminates when no new point can be added to any cluster.

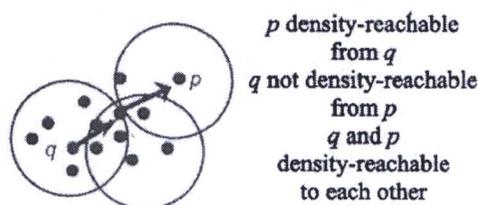

**Figure 3:** Density-reachability and density-connectivity

In this process, we have to determine the parameters of Eps and MinPts for our index contour image which we got from previous process. The selection of a set of suitable parameter is very important. This is because of the segmentation result depends largely on the given parameters. According to the resolution and quality of topographic map, the parameters of each map are not the same. Therefore, we survey our test map and find out a set of suitable parameters to use with DBSCAN algorithm. After we have got a set of parameters, we tested it until we get a satisfy performance. We then calculate an eigenvector and eigenvalue of each altitude numeric image for transforming to be upright numeric.

### 3.3 Back-propagation neural network

Standard back-propagation neural network [6] with three layers of 200x400x10 nodes is used for recognition after we got all upright altitude numeric. The neurons at input layer take the altitude numerical image obtained from section 3.2 and transfer data to the hidden layer. The number of hidden layers will be double of its input layer. Hidden layer used to calculate the weight of neurons from its input layer and generate a signal with the help of sigmoid activation function, and transfer the signal to the output layer. The number of output layers is 10. The objective function for this paper is LSM with  $\varepsilon \leq 0.01$


#### 4. Experimental results


To verify our proposed method, experiments were performed on images with different resolution on Pentium Core2duo 1.66 GHz notebook. As example, we use a sample  $440 \times 565$  United States Geological Survey (USGS) image in figure 4(a) and 4(b) shows its foreground. Figure 4(c) shows binary index contour image which created by histogram analysis method. The performance of figure 4(c) presents that our proposed method is efficiency. Figure 4(d) presents segmented image using density based clustering in the first round and Figure 4(e) shows the second iteration of the density based algorithm. Figure 4(f) shows a sample of upright transform altitude numeric.

#### 5. Conclusion

This paper has proposed a combination of Back-propagation neural network techniques and density based clustering to recognize altitude numeric of index contour lines from scanned topographic map.

The experiment results confirm that the proposed method is suitable for the environment stated above. However, in the future studies we aim to improve the way in which the recognition can be done with more general type of map.

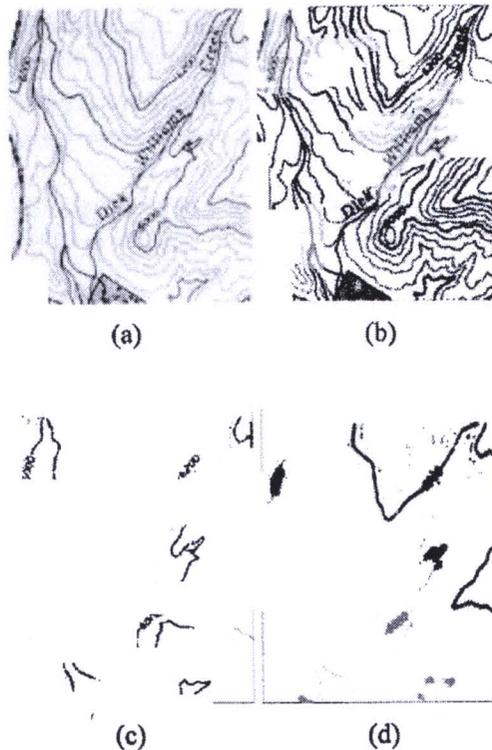

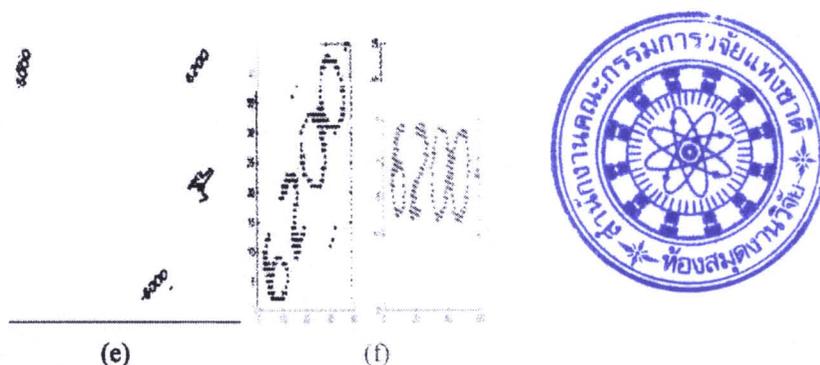

**Figure 4:** Performance of proposed method on sample USGS map: (a) Original image, (b) foreground image, (c) Image using histogram analysis method, (d) segmented altitude numeric using density based in first round, (e) second round of segmentation, (f) Numeric transformation before recognizing

## 6. References

- [1] Aria Pezeshk, Richard L. Tutwiler, "Contour Line Recognition & Extraction from Scanned Colour Maps Using Dual Quantization of the Intensity Image", Proceedings of IEEE Southwest Symposium Image Analysis and Interpretation, 2008, page 173 – 176.
- [2] Du Jinyang and Zhang Yumei, "Automatic extraction of contour lines from scanned topographic map", Proceedings of IEEE International Geoscience and Remote Sensing Symposium, 2004, vol.5, page 2886 – 2888.
- [3] Martin Ester, Hans-Peter Kriegel, Jorg Sander and XiaoWei Xu, "A Density-Based Algorithm for Discovering Spatial Databases With Noise," Proceedings of 2 " International Conference on Knowledge Discovery and Data Mining, 1996.
- [4] Qixiang Ye, Wen Gao and Wei Zeng, "Color image segmentation using density-based clustering", Proceedings of IEEE International Acoustics, Speech, and Signal, 2003, vol.3, Page III345 – 348.
- [5] Rafael C. Gonzalez, Richard E. Woods and Steven L. Eddins, Digital Image Processing using Matlab, Prentice Hall, 2004.
- [6] Simon Haykin, Neural Networks: A Comprehensive Foundation, 2nd edition, Prentice Hall, 1998.

